

P.O. Box 429 • 500 North Vine Street New Lenox, IL 60451-0429 (800) 637-1067 • (815) 485-2156 FAX (815) 485-5840

http://www.corcoranpumps.thomasregister.com


Problem:

TO TOTAL

Snack foods manufacturer required compact, quiet pumps for process water, 140° F, 25 GPM @ 92 FT TH (40 PSI) with complete wash-down capability.

Solution:

Model: 5000D (AA05) Closed-Coupled Centrifugal Size: 2 x (1/2) 1 FNPT

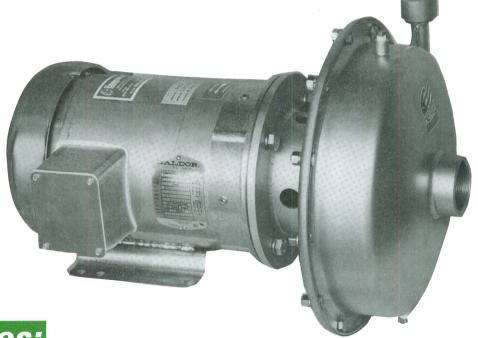

Features:

- 1. All 316 Stainless Steel construction
- 2. Baldor "paint free" Stainless Steel, washdown duty motor: 3 HP, 1750 RPM, 208-230/460V, TEFC, 1.15 SF, 182 TC with base
- 3. Low Flow, High Head impeller: 10.78" diameter with 1/4" wide vanes (5)
- 4. Single internal mechanical seal: Carbon vs Silicon carbide faces and EPDM elastomers